



# Assessment of Tank Water Spread Area in Cheyyar Sub Basin Using Sentinel 1A Data

S. Sakthivel <sup>a++\*</sup>, A. P. Sivamurugan <sup>b#</sup>, S. Pazhanivelan <sup>b†</sup>,  
K. P. Ragnath <sup>b‡</sup> and A. Suganthi <sup>c^</sup>

<sup>a</sup> Department of Agronomy, Tamil Nadu Agricultural University, Coimbatore, India.

<sup>b</sup> Centre for Water and Geospatial Studies, Tamil Nadu Agricultural University, Coimbatore, India.

<sup>c</sup> Department of Agricultural Entomology, Tamil Nadu Agricultural University, Coimbatore, India.

## Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

## Article Information

DOI: 10.9734/IJECC/2023/v13i92524

## Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/103897>

Original Research Article

Received: 24/05/2023

Accepted: 28/07/2023

Published: 04/08/2023

## ABSTRACT

A research study was conducted for estimating the water spread area of tanks in Cheyyar sub basin for the year 2022. Tanks are low-cost irrigation water source and play a key role in recharge of ground water. Mapping and regular monitoring of tanks plays an important role in water resource planning. Sentinel-1A SAR data has high potential in estimating water spread area as it is unaffected by cloud cover, light or weather conditions. After processing the obtained satellite data using SNAP software, the water spread area was obtained by threshold approach. The backscattering (dB) value ranged between -30.641 and 22.898 during the course of study. The total

<sup>++</sup>PG Scholar;

<sup>#</sup> Associate Professor (Agronomy);

<sup>†</sup> Director;

<sup>‡</sup> Associate Professor (SS&AC);

<sup>^</sup> Associate Professor (Agricultural Entomology);

\*Corresponding author: E-mail: sakthivelsivakumar888@gmail.com;

water spread area was noticed maximum and minimum during the month of January and July with 5728.20 ha and 1123.44 ha (21.88% and 4.29 % of total tank area) respectively. The total rainfall received in Cheyyar sub basin was about 1290 mm. The water spread area seems to be proportional to the rainfall of previous and current months.

**Keywords:** Remote sensing; SAR; Sentinel-1A; tanks; water spread area.

## 1. INTRODUCTION

Water, being the critical input in crop production, plays a key role in food security. As a non-renewable resource, the availability of freshwater is decreasing day by day owing to more usage by domestic and industrial sectors. Hence, water resource planning is necessary for framing of effective cropping system to achieve more water productivity. Tanks (small reservoirs) are source of irrigation since Vedic period as they are important to thousands of marginal and small-scale farmers and are less capital expensive and have a greater geographical dispersion than large projects. There are 41,123 tanks in Tamil Nadu and along with canals, tanks contribute to 37.34 % of net irrigated area [1]. Mapping and monitoring of water bodies in river basin/sub-basin can help in assessing water spread area.

Conventional methods of finding water spread area involve more investments and are time-consuming. With an advent of remote sensing techniques, analysis of water spread area has become much easier with help of satellite data sets. Mapping of surface water is one of the important applications of remote sensing in estimating the availability of water, measuring its change in time, and predicting droughts and floods [2]. Optical and microwave sensors can be used for monitoring changes in water bodies but the problem with optical data is that they are affected by light and cloud cover.

Synthetic Aperture Radar (SAR) sensors generates its own energy and then measures how much of that energy is reflected back after interacting with the Earth's surface [3]. SAR data is commonly utilized for surface water monitoring [4]. SAR wavelengths are unaffected by cloud cover, illumination, weather conditions and vegetation. Sentinel-1A SAR Ground Range Detected (GRD) in VV polarization has high resolution (10m) and greater accuracy in surface water monitoring [5]. SAR microwave sensor was suitable for flood and surface water mapping [6]. Comprehensive use of SAR data helps in water resource management and accurate flood

assessment [7]. So, SAR data is widely used in water spread dynamic assessments.

Assessing water spread area in tanks by conventional methods involves field survey, which is costly, time-consuming method, require considerable manpower and sophisticated instruments. At present, water spread area estimation is mainly focused on larger reservoirs and dams. So, this study aims to assess the water spread dynamics in tanks in Cheyyar Sub basin using SAR data.

## 2. REVIEW OF LITERATURE

### 2.1 Importance of Tanks in Agriculture

Tank irrigation accounts for almost 30 % of total irrigated area in southern states of India [8]. In ancient Tamil Nadu, tanks were mainly maintained by farmers but after ryotwari system in 1886, tanks with ayacut of 40 ha and more were bought under PWD control while smaller tanks were administered by local bodies [9].

Tanks being vast in size, are important traditional source of water supply in India. Tanks provide low-cost irrigation for farmers and so they are mostly maintained by farmers [10]. Tanks store water in dispersed and decentralized form, they are eco-friendly forms of water management [11].

Irrigation tanks have now re-emerged as the best example of providing extensive (protective) irrigation in the semi-arid tropics. Because these tanks are distributed across the landscape benefitting mostly small and marginal farmers, tanks are considered as the best adaptation to climate change [12].

### 2.2 Assessment of Water Spread Area

Sentinel-1A SAR data was used for the monitoring of water surface variations in Lake Dongting, China. Both VV and VH polarization were used and thresholding classification method was used to study monthly variations in Lake Dongting [13].

Sentinel-1A SAR data was used to monitor the water spread area of tanks in Manamelkudi block of Pudukkottai district. VH polarization was used for the study and a simple thresholding method was used to estimate the water spread area [14].

Water spread area of the Umiam reservoir was estimated using Landsat 8-OLI satellite data. Sub-pixel classification approach was adopted to extract the water-spread area of the reservoir. Linear Mixture Modelling was adopted for sub pixel classification and found that the water spread areas extracted were lower to that of actual data [15].

Due to the unique characteristics of microwaves, Synthetic Aperture Radar (SAR) data are better data source for mapping of surface water, saturated soils, and flooded vegetation [16].

### 3. MATERIALS AND METHODS

#### 3.1 Study Area

Cheyyar sub basin is the largest sub basin of Palar basin covering a catchment area of 4362.69 sq.km, spread over the districts of Kanchipuram, Thiruvannamalai, Vellore and Ranipet. The Cheyyar sub basin is surrounded by Agaramaru sub basin in the North and Pennaiyar basin in the South and West and Kiliyar sub basin in the East. The basin is located between 12°14' N to 12°55' N and 78°39' E to

79°52' E. Cheyyar river originates from the Jawadu Hills in Chengam taluk runs for about 186 km to join Palar River at Thirumakkudal village. The general slope of sub basin is steep to moderate with 2 topographical divisions, hill range of Eastern Ghats and plateau region. The predominant soil orders found in the sub basin are Inceptisol, Alfisol, Entisol, Ultisols and Vertisol. The basin with 535 tanks has a total command area of 43626.08 ha. The study area map is given in Fig. 1.

#### 3.2 Satellite Data

Sentinel-1 is an imaging radar mission giving continuous all-weather, day and night imagery at C-band. Synthetic Aperture Radar (SAR) data from Sentinel-1A C-band GRD was obtained from European Space Agency's Sentinel Scientific Data Hub (<https://scihub.copernicus.eu/dhus/>).

Interferometric Wide swath (IW) mode is the primary operational mode of Sentinel-1A over land. Sentinel-1 is a dual polarization SAR system that preserves phase. It is capable of transmitting and receiving signals in both H and V polarizations. VV Polarization amplifies the effect of water surface roughness [17], VV polarization was effective in detecting surface water than VH polarization [18], Hence, VV polarization is used in this study. The methodology of water spread area estimation is depicted in Fig. 2.

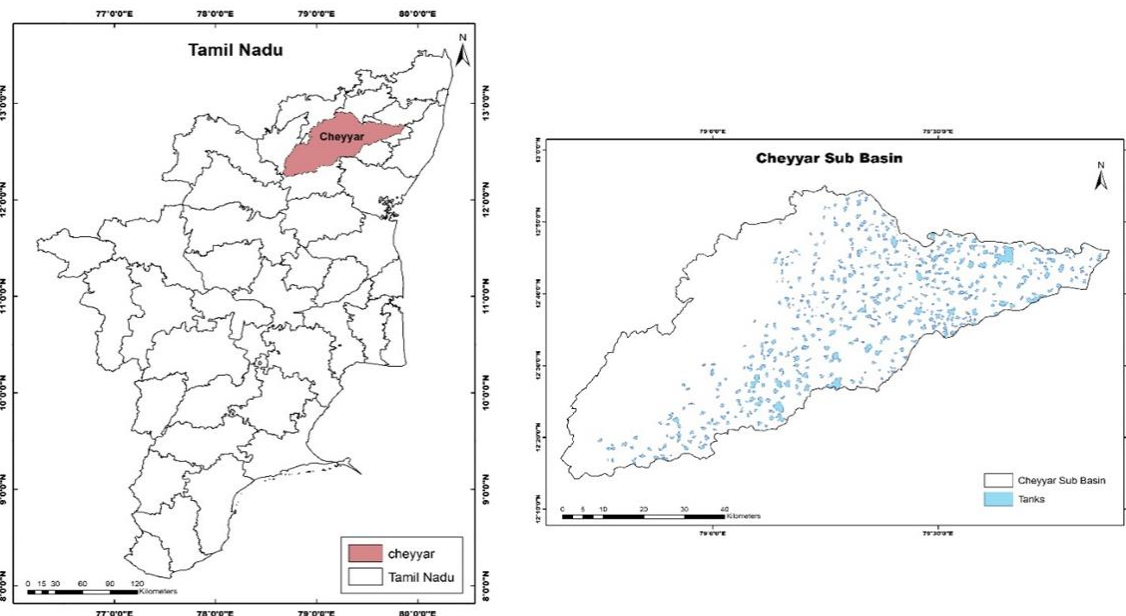


Fig. 1. Study area map

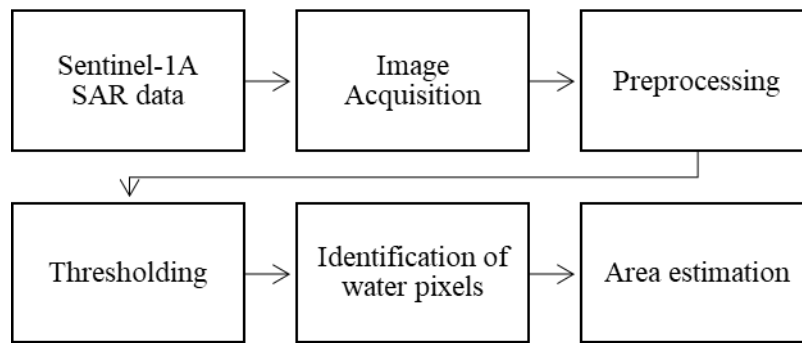


Fig. 2. Methodology

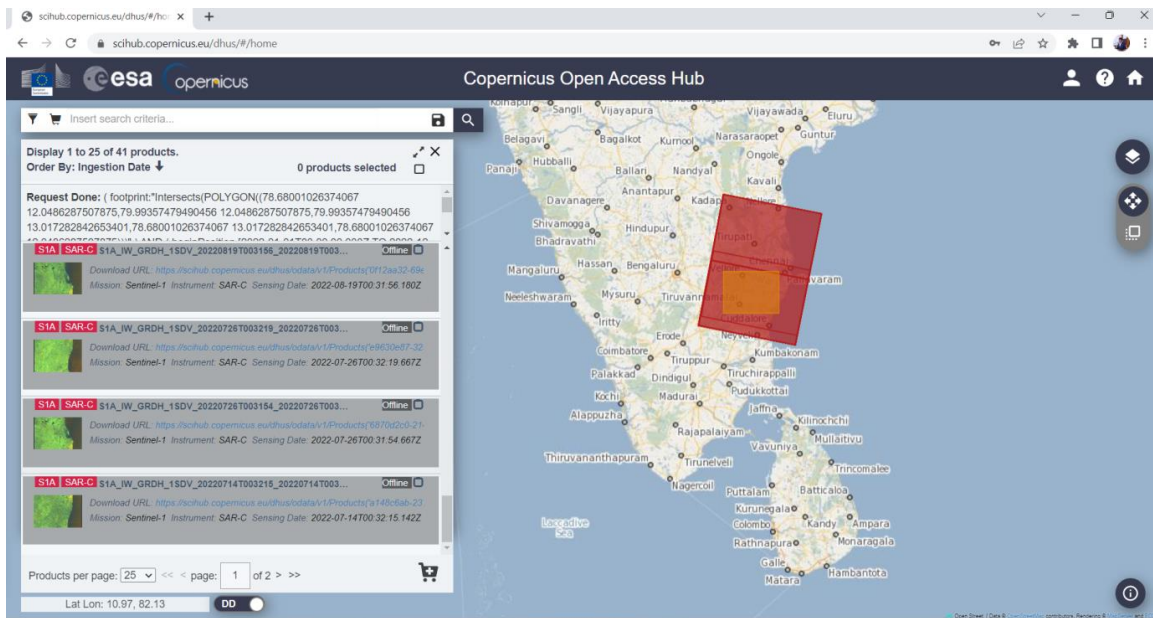


Fig. 3. Image Acquisition for ESA Copernicus website

### 3.3 Image Acquisition

Datasets were acquired at 12 days interval with spatial resolution of 20m and swath of 250 km for a period of 12 months (2022) from Copernicus Open Access Hub (Fig. 3).


### 3.4 Preprocessing of SAR Data

SAR data acquired by radar sensors require preprocessing to improve the quality of images. SNAP software from ESA was used for preprocessing which was carried out in steps [19] (Fig. 4). Accurate position of SAR metadata is attained with the application of orbit file. Thermal noise affects the image quality and its removal helps in normalization [20], By removing border noise, invalid data is removed. Calibration helps in converting digital pixel values to SAR backscatter. Speckle (granular noise) filtering

reduces thermal noise error [21,22] and radiometric correction is done to obtain quantitative data in dB (decibel) [23].

### 3.5 Thresholding

Water and non-water area need to be identified for estimating water spread area. Thresholding is an important step in the histogram-based approach, processing of images and image pattern recognition [24]. Thresholding algorithms on SAR images are widely utilized since they are effective and take up little processing effort. Histogram thresholding is the most widely used technique for converting image values with single band to water and non-water pixels [25,26]. Hence, thresholding with a dB value of -21 is used for estimating the dynamics of water spread [27].

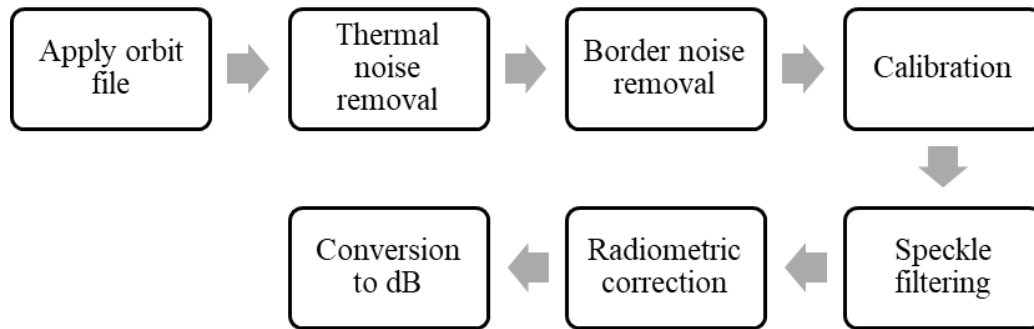

**Fig. 4. Preprocessing of SAR data**

### 3.6 Rainfall Data

Rainfall has a direct impact on the water spread area and filling of tanks. IMD provides daily high spatial resolution (0.25 x 0.25 degree) grid data. The rainfall data from IMD is downloaded, processed and monthly rainfall is calculated for discussion. Monthly rainfall of 2022 is given in Fig. 5.

## 4. RESULTS AND DISCUSSION

SAR data downloaded from Sentinel-1A satellite is preprocessed with SNAP software and the backscattering values obtained after preprocessing are presented in Table 1.

Higher (brighter tone) backscattering values correspond to constructions and cities, while lower (darker tone) backscattering values correlate to water pixels. The values of the intermediate backscatter are associated with vegetation, barren land and dry soils.

### 4.1 Tank Area Estimation

Water spread area in tanks was estimated using thresholding, a quicker method to generate binary pixels. The water spread area of tanks in Cheyyar basin during the months of 2022 is given in Fig. 5.

The estimated average water spread area in tanks was 3042.61 ha in the year 2022. The highest water spread area was recorded in the month of January (5728.20 ha) while the lowest water spread area was in July (1123.44 ha).

The water spread area of tanks was grouped with the percentage interval of 0% (no water spread), 0 to 25% filled, 25 to 50% filled, 50 to 75% filled, and above 75% (75-100%) filled tank


capacity. On average out of 535 tanks, 193 tanks remain unfilled throughout the year and the maximum of 282 tanks comes under the range of 0-25%, 50 tanks come under the category of 25-50% and the remaining 10 tanks observed 50-75% filling. Month-wise water spread area (%) range is depicted in Fig. 6.

Rainfall being the major source of water for tanks, it plays an inevitable role in water spread area. The total rainfall received during 2022 in Cheyyar sub basin was about 1290 mm [28]. In November and December, 2021 about 690 mm of rainfall was recorded in Cheyyar sub basin resulting in the filling of tanks and the water spread area reached a peak in January. Cheyyar received only about 50 mm in Jan-Apr 2022 and this resulted in gradual decrease in water spread area. Though May month received about 150 mm, due to peak summer water consumption was more resulting in further decline. Crop cultivation needs water and tank water being the important recharge source for wells and borewells, Water spread area in tanks reached as low as 1123.44 ha in July. Rainfall from South West monsoon resulted in filling up of tanks and system tanks receiving water from Cheyyar river, filled quickly so that water spread area increased and also reduction in rainfall in September affected water spread in October and November. North East monsoon rainfall increased the water spread area in December, 2022.


With regard to water spread area in hectare on average 193 tanks (36.12%) have no water spread area and 271 tanks (50.69%) have a water spread area of 0-10 ha. Also, 42 tanks (7.93%) have water spread of 10-25 ha and 29 tanks (5.26%) showed water spread area more than 25 ha. Month wise water spread area(ha) is given in Fig. 7.

**Table 1. Backscattering values**


Month	Backscattering (dB) Value
January, 2022	-29.201 to 20.618
February, 2022	-30.641 to 19.233
March, 2022	-29.456 to 17.150
April, 2022	-28.979 to 16.226
May, 2022	-28.298 to 19.386
June, 2022	-27.611 to 18.532
July, 2022	-27.155 to 17.301
August, 2022	-29.641 to 18.954
September, 2022	-29.188 to 16.708
October, 2022	-29.487 to 17.013
November, 2022	-27.940 to 22.898
December, 2022	-29.843 to 17.708

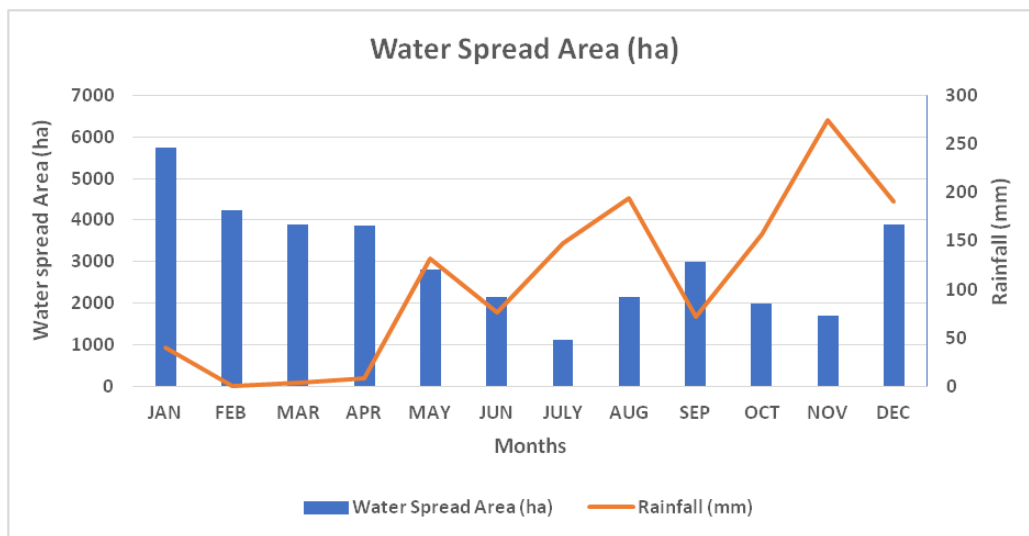

**Fig. 5. Water spread area (ha) and Rainfall for Cheyyar sub basin in 2022**

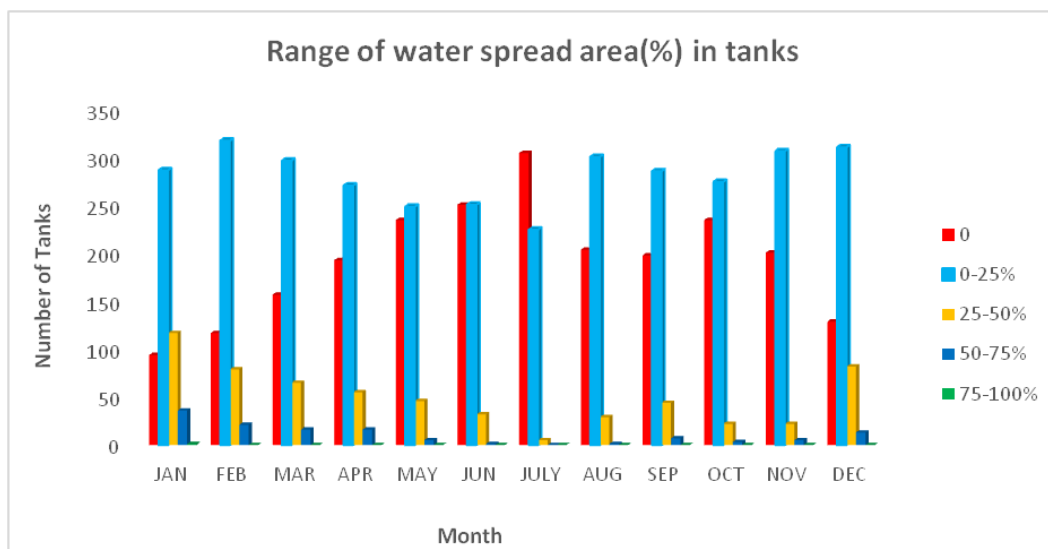

**Fig. 6. Range of Water spread area (%) month wise (2022) in Cheyyar sub basin**

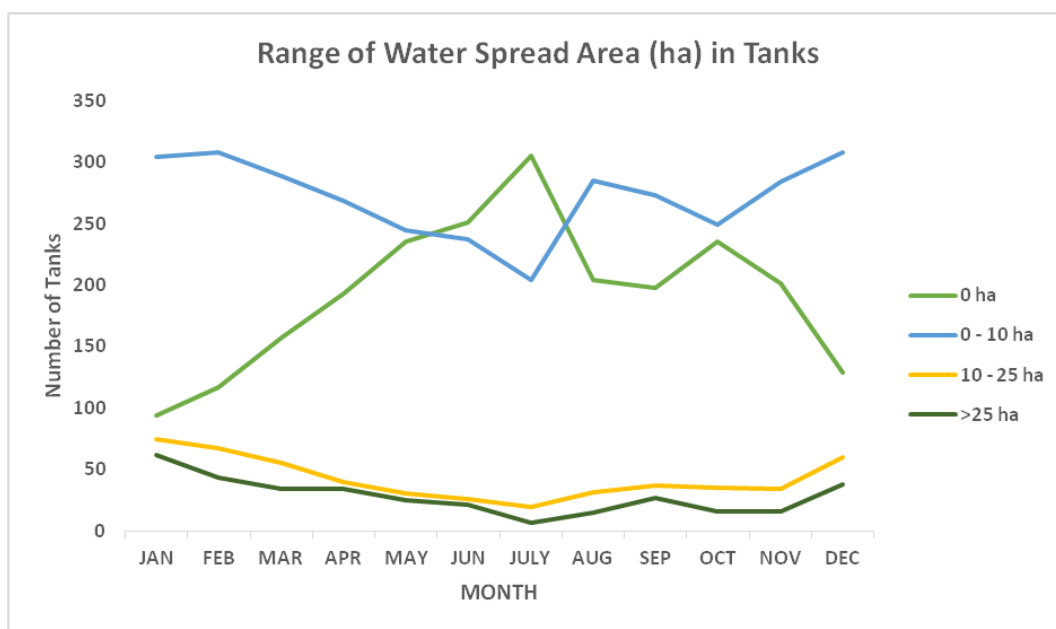

**Fig. 7. Water spread area (ha) month wise (2022) in Cheyyar sub basin**

January month recorded lower number of tanks (94 tanks) with no water spread area and higher number of tanks (62 tanks) with water spread more than 25 ha. Also, July month with lower water spread area has 305 tanks with no water spread and only 7 tanks with water spread greater than 25 ha.

## 5. CONCLUSION

The SAR data obtained from Sentinel-1A after preprocessing and thresholding is highly useful in estimating the water spread area and dynamics of water spread. The average water spread area of tanks in Cheyyar basin during 2022 was 3043.02 ha with maximum water spread area in January (5728.20 ha), while July month with 305 unfilled tanks recorded the lowest water spread area (1123.44 ha). From the correlation between rainfall and tank water spread, it is evident that rainfall is the key factor in determining the water spread area of tanks in Cheyyar sub basin. Tank water spread area analysis helps in obtaining more precise data and useful to farmers for optimizing suitable cropping pattern at regional level.

## ACKNOWLEDGEMENT

The authors thankfully acknowledge the Department of Agronomy, and Centre for Water and Geospatial Studies, TNAU, Coimbatore for giving guidance for the research work. We also

express our gratitude to the Head of the Department, Staff members and colleagues for their valuable comments and positive suggestions given by them during the course of this research work.

## COMPETING INTERESTS

Authors have declared that no competing interests exist.

## REFERENCES

1. Government of Tamil Nadu. Season and Crop Report; 2022. Available: <https://www.tn.gov.in/crop/stat.htm>
2. Isikdogan F, Bovik AC, Passalacqua P. Surface water mapping by deep learning. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*. 2017;10(11):4909-4918.
3. Flores-Anderson AI, Herndon KE, Thapa RB, Cherrington E. *The SAR handbook: Comprehensive Methodologies for Forest Monitoring and Biomass Estimation*; 2019.
4. Zhang W, Hu B, Brown GS. Automatic surface water mapping using polarimetric SAR Data for Long-term Change Detection. 2020; *Water*12 (3):872.
5. Pham-Duc B, Prigent C, Aires F. Surface water monitoring within Cambodia and the Vietnamese Mekong Delta over a year,

- with Sentinel-1 SAR Observations. 2017; *Water* 9 (6):366.
6. Chen Y, Qiao S, Zhang G, Xu YJ, Chen L, Wu L. Investigating the potential use of Sentinel-1 data for monitoring wetland water level changes in China's Momoge National Nature Reserve. *PeerJ*. 2020;8:e8616.
  7. Schumann GJP, Moller DK. Microwave remote sensing of flood inundation. *Physics and Chemistry of the Earth, Parts a/b/c*. 2015;83:84-95.
  8. Palanisami K, Easter KW. Tank irrigation in India and Thailand: Problems and prospects. *Irrigation Management Network, Network Paper* 1984;10e:1-2.
  9. Palanisami K. Sustainable management of tank irrigation systems in India. *Journal of Developments in Sustainable Agriculture*. 2006;1(1):34-40.
  10. Narayanamoorthy A. Tank irrigation in India: a time series analysis. *Water Policy*. 2007;9(2):193-216.
  11. Shah E. Telling otherwise: a historical anthropology of tank irrigation technology in south India. *Technology and Culture*. 2008;49(3):652-74.
  12. Palanisami K. Tank Irrigation in India: Future Management Strategies and Investment Options; 2022.
  13. Xing L, Tang X, Wang H, Fan W, Gao X. Mapping Wetlands of Dongting Lake in China Using Landsat and sentinel-1 time series at 30M. *The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*. 2018; 42:1971-6.
  14. Pandiya Kumar D, Kannan B, Panneerselvam S, Kumaraperumal R, Pazhanivelan S, Rangunath K, et al. Mapping and Estimation of Water Spread Area in Manamelkudi block of Pudukkottai District using Sentinel-1A Data. *EEC*. 2022;28(01s):71.
  15. Ritshong AA, Kumar JS. Assessment of Water Spread Area by Sub pixel Classification in Umiam Reservoir, Meghalaya, India; 2016.
  16. White L, Brisco B, Dabboor M, Schmitt A, Pratt A. A collection of SAR methodologies for monitoring wetlands. *Remote sensing*. 2015;7(6):7615-45.
  17. Liu C. Analysis of Sentinel-1 SAR data for mapping standing water in the Twente region. University of Twente; 2016.
  18. Clement T, John G, Yin F. Assessing the increase in background oil contamination levels in Alabama's nearshore beach environment resulting from the Deepwater Horizon oil spill. *Oil Spill Science and Technology*. 2017;851-888.
  19. Filipponi, F. Sentinel-1 GRD preprocessing workflow. *International Electronic Conference on Remote Sensing*; 2019.
  20. Park JW, Korosov A, Babiker M. Efficient thermal noise removal of Sentinel-1 image and its impacts on sea ice applications. *EGU General Assembly Conference Abstracts*; 2017.
  21. Yommy AS, Liu R, Wu S. SAR image despeckling using refined Lee filter. 2015 7th International Conference on Intelligent Human-Machine Systems and Cybernetics; 2015.
  22. Ansari J, Ghosh SM, Behera MD and Gupta SK. A Study on Speckle Removal Techniques for Sentinel-1A SAR Data Over Sundarbans, Mangrove Forest, India. *IEEE India Geoscience and Remote Sensing Symposium (InGARSS)*; 2020.
  23. Schmidt K, Ramon NT, Schwerdt M. Radiometric accuracy and stability of sentinel-1A determined using point targets. *International Journal of Microwave and Wireless Technologies*. 2018;10 (5-6): 538-546.
  24. Bazi Y, Bruzzone L, Melgani F. Automatic identification of the number and values of decision thresholds in the log-ratio image for change detection in SAR images. *IEEE Geoscience and Remote Sensing Letters*. 2006;3(3):349-353.
  25. Pulvirenti L, Pierdicca N, Chini M, Guerriero L. An algorithm for operational flood mapping from Synthetic Aperture Radar (SAR) data using fuzzy logic. *Natural Hazards and Earth System Sciences*. 2011;11(2):529-540.
  26. Boni G, Ferraris L, Pulvirenti L, Squicciarino G, Pierdicca N, Candela L, et al. A prototype system for flood monitoring based on flood forecast combined with COSMO-SkyMed and Sentinel-1 data. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*. 2016; 9(6):2794-2805.
  27. Pandiya kumar, D. Spatio-Temporal Analysis of Water Spread Area And Water Storage In Tanks Using Sentinel-1A SAR



And Drone Images. M.Sc Thesis, Unpublished, Tamil Nadu Agricultural University, Coimbatore, Tamil Nadu; 2021.

28. IMD. Yearly Gridded Rainfall (0.25 x 0.25) Data; 2023.  
Available:[https://www.imdpune.gov.in/cmpg/Griddata/Rainfall\\_25\\_Bin.html#](https://www.imdpune.gov.in/cmpg/Griddata/Rainfall_25_Bin.html#)

---

© 2023 Sakthivel et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

*Peer-review history:*

*The peer review history for this paper can be accessed here:*

<https://www.sdiarticle5.com/review-history/103897>